



ADA-0030 868/915/LTE/5G

Antenna **Feature:**

- Support 5G, 4G, 3G, 2G, 868, 915 applications
- Fixed or detachable cable mounting design
- Flexibility to different cable options
- Low profile structure design
- IPX7 fully waterproof
- Detachable type with N Female connector

Application:

- Data communication & transforming
- Wireless monitoring


RoHS/Reach

ADA-0030


Specifications:

Category	Specifications
Frequency	866-928/704-960 / 1710-2690/ 3300-3800 MHz
Gain	typ. 6.0dBi/866-928 MHz; 4.0dBi/1710-3800 MHz
V.S.W.R:	< 2,7
Impedence	50 ohm
Cable/Connector	H-100, 1.5 meters, SMA(male)
Polarization	Linear, Vertical
Dimension	42mm(Dia.) x 75.6mm(H)
Operation Temperature	-40°C to +80°C
Storage Temperature	-40°C to +80°C

* This specification is subject to change without prior notice

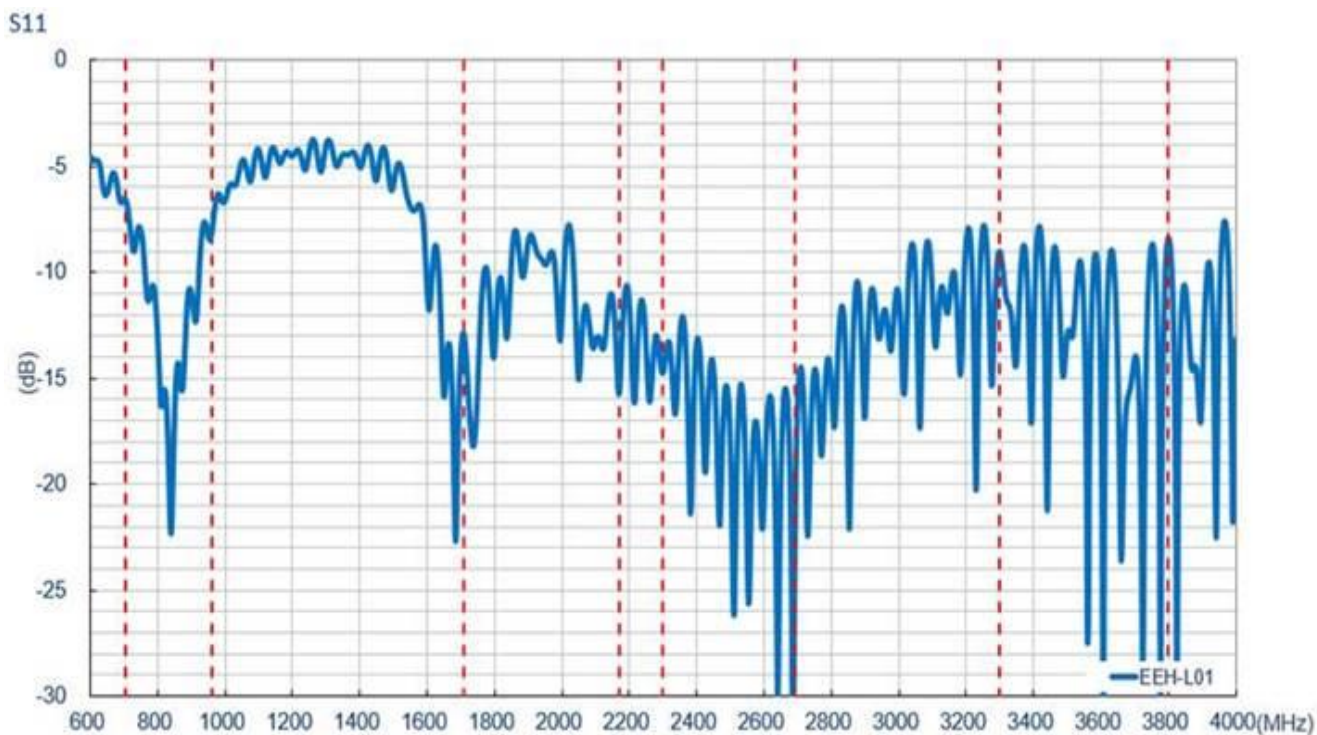

ADA-0030

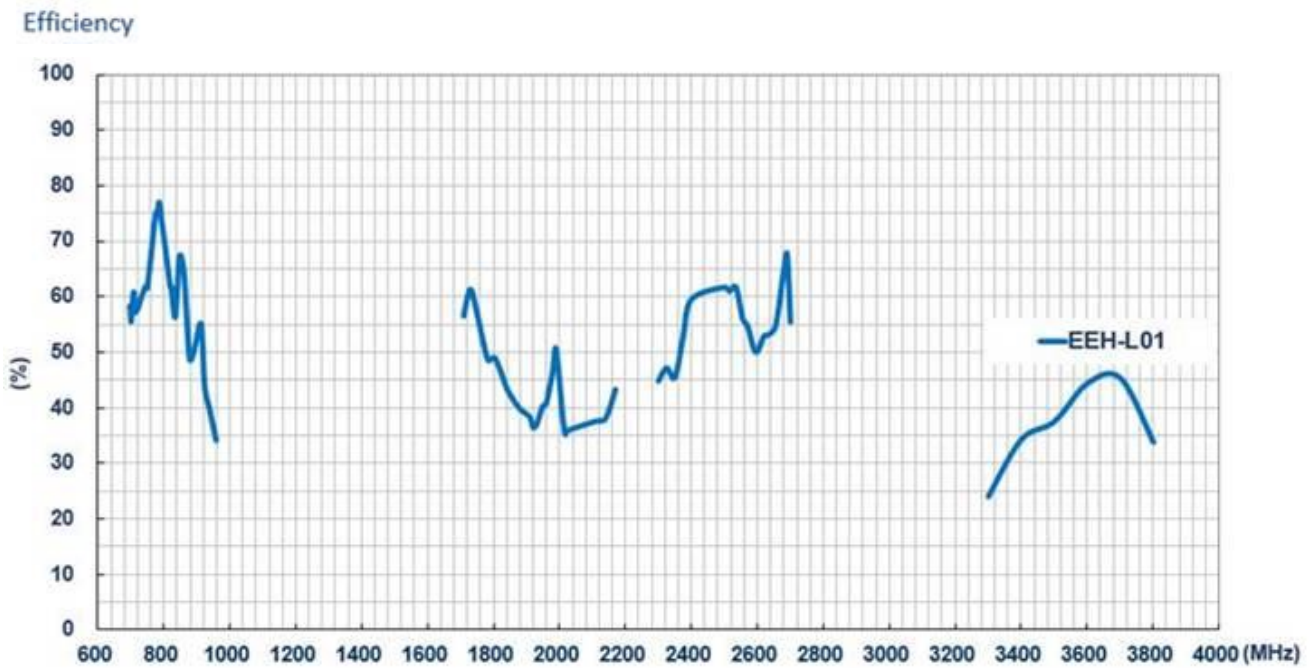

Mechanical Drawings (mm):

