


NO	DESCRIPTION	DATE
①	MODIFICATION PART⑤ ADD 4 STAMPING	01.23.02'
②	BACKGROUND FORMAT UPDATED	08.08.02'
③	MODIFICATION NOTES 4.	10.19.04'
④	BACKGROUND FORMAT UPDATED	10.15.08'

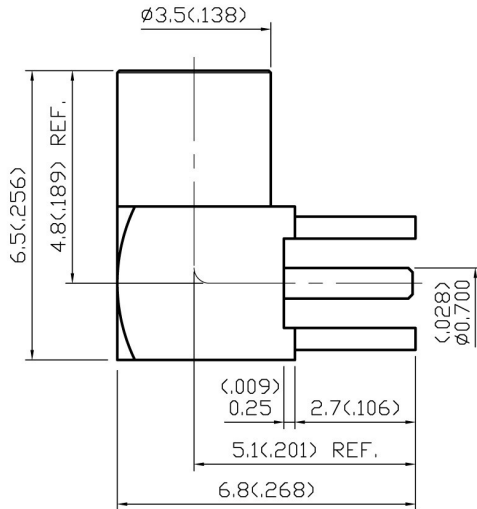

#### 1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-6 GHz  
1.2 NOMINAL IMPEDANCE: 50 OHMS  
1.3 WORKING VOLTAGE: 250 VOLTS MAX.  
1.4 PROOF VOLTAGE: 500 VOLTS  
1.5 VSWR: 1.35 MAX.

#### 2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604  
2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300  
2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

#### 3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.



#### 4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: BS EN 122340

#### 5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -55° C TO +155° C


5	INSULATION	TEFLON	1	NONE
4	BODY II	BRASS	1	GOLD 3μ" MIN.
3	INSULATION	TEFLON	1	NONE
2	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 30μ" MIN.
1	BODY I	BRASS	1	GOLD 3μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

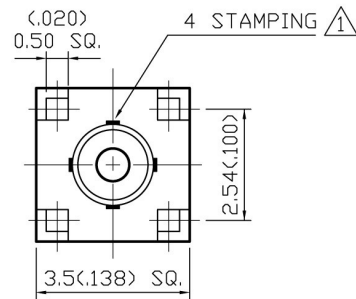

<5> Ø0.8<(.031)> MIN.  
MOUNTING HOLE

APPROVED

by \_\_\_\_\_ DATE: \_\_\_\_\_

DESCRIPTION			MMCX RIGHT ANGLE PCB MOUNT JACK RECEPTACLE									
製圖	DRAWN	TOLERANCE		品名	ADA-37071 T.G.G			日期	DATE	版次	REV.	
	Yoko	.X	±0.2	TITLE	\ROHS COMPLIANT (50Ω)			11.22.00'		A-4		
檢圖	CHECK	.XX	±0.1	單位	UNIT	DWG.NO. 37-0015						
	Arc	.XXX	±0.05		mm(in)							
認定	APPROVAL	.XXX	±0.05	比例	SCALE							
	Lewis	ANGLE	±5°		8:1							

ADATUS