



1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC-12.4 GHz
1.2 NOMINAL IMPEDANCE: 50 OHM
1.3 WORKING VOLTAGE: 500 VOLTS MAX.
1.4 PROOF VOLTAGE: 1000 VOLTS
1.5 VSWR: 1.23 MAX. 

2.0 MATERIALS

2.1 BODIES: BRASS PER JIS-C3604
2.2 CENTER CONTACT: BRASS PER JIS-C3604  BERYLLIUM COPPER PER ASTM
2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM

3.0 FINISHES AND OTHERS


3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: -65° C TO +1

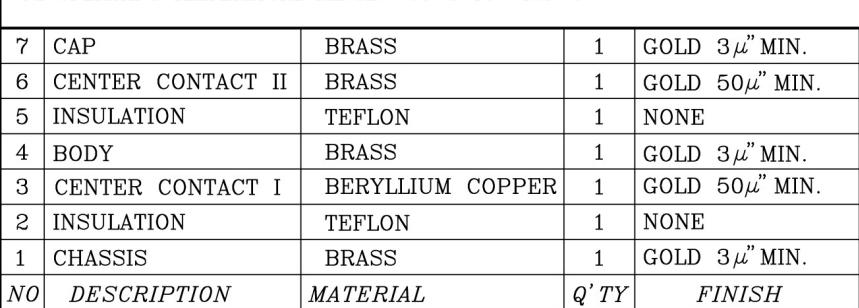

by _____ DATE: _____

ADACTUS